


**POWERX2™**







In critical moments, every decision means  
the difference between chaos or control,  
safety or danger, or even life or loss.

Small details become huge.  
They can mean all the difference  
when everything is on the line.



By prioritizing control and reliability,  
the all-new FERNO POWER X2™  
empowers operators to focus on  
what matters most—delivering safe  
and effective patient care.



**CROSSLOCK**

UNIVERSALLY COMPATIBLE WITH MANUAL  
AND POWERED FASTENING SYSTEMS



**EZGLIDE**

27% LARGER WHEELS  
INCREASED GROUND CLEARANCE  
ENHANCED STABILITY  
GREATER MANEUVERABILITY



**ENDURACHARGE**

36-VOLT LiFePO4 BATTERY  
LASTS 2X LONGER THAN  
COMPETITOR'S



**SCENE BRIGHT**

360° ILLUMINATION  
TWO-STAGE LIGHTING





# Universally cross-compatible design for today and tomorrow.

The FERNO® POWER X2™ is universally compatible with manual and powered fastening systems to eliminate financial and equipment barriers for those looking for a long-term solution today.

The FERNO® POWER X2™ is compatible with:

- FERNO POWER F2™ Fastening System\*
- FERNO PRO F1 manual fastener\*
- FERNO and Stryker® Antler Rail systems / mass casualty fasteners
- Stryker Performance-LOAD® manual fastener\*
- Stryker Power-LOAD® loading system\*

\* COMPATIBILITY KIT NEEDED TO SECURE THE FERNO POWER X2 INTO THE FERNO POWER F2, FERNO PRO F1, STRYKER PERFORMANCE-LOAD AND STRYKER POWER-LOAD.



**POWERF2**

Introducing the all-new FERNO® POWER F2™ Fastening System with CrossDrive, the first system to offer true cross-compatibility for manual and powered ambulance cots. Designed, engineered, and built to lift, load, and unload patients in the most challenging conditions with the touch of a button, giving emergency personnel total control while reducing injuries and staying ready for whatever comes next.






A new standard in paramedic safety, efficiency, and maneuverability.


- 1 Upgraded with our largest wheels, to increase ground clearance and provide superior performance
- 2 Directional wheel locks\* for additional control in tight areas
- 3 Push pull bar\* for optimal control and comfort when transporting patients at lower heights
- 4 Two-stage LED lighting that provides 360° illumination
- 5 Increased maneuverability in tight spaces with our telescoping load frame
- 6 Manual operation option in the event of power loss

\* OPTIONAL EQUIPMENT



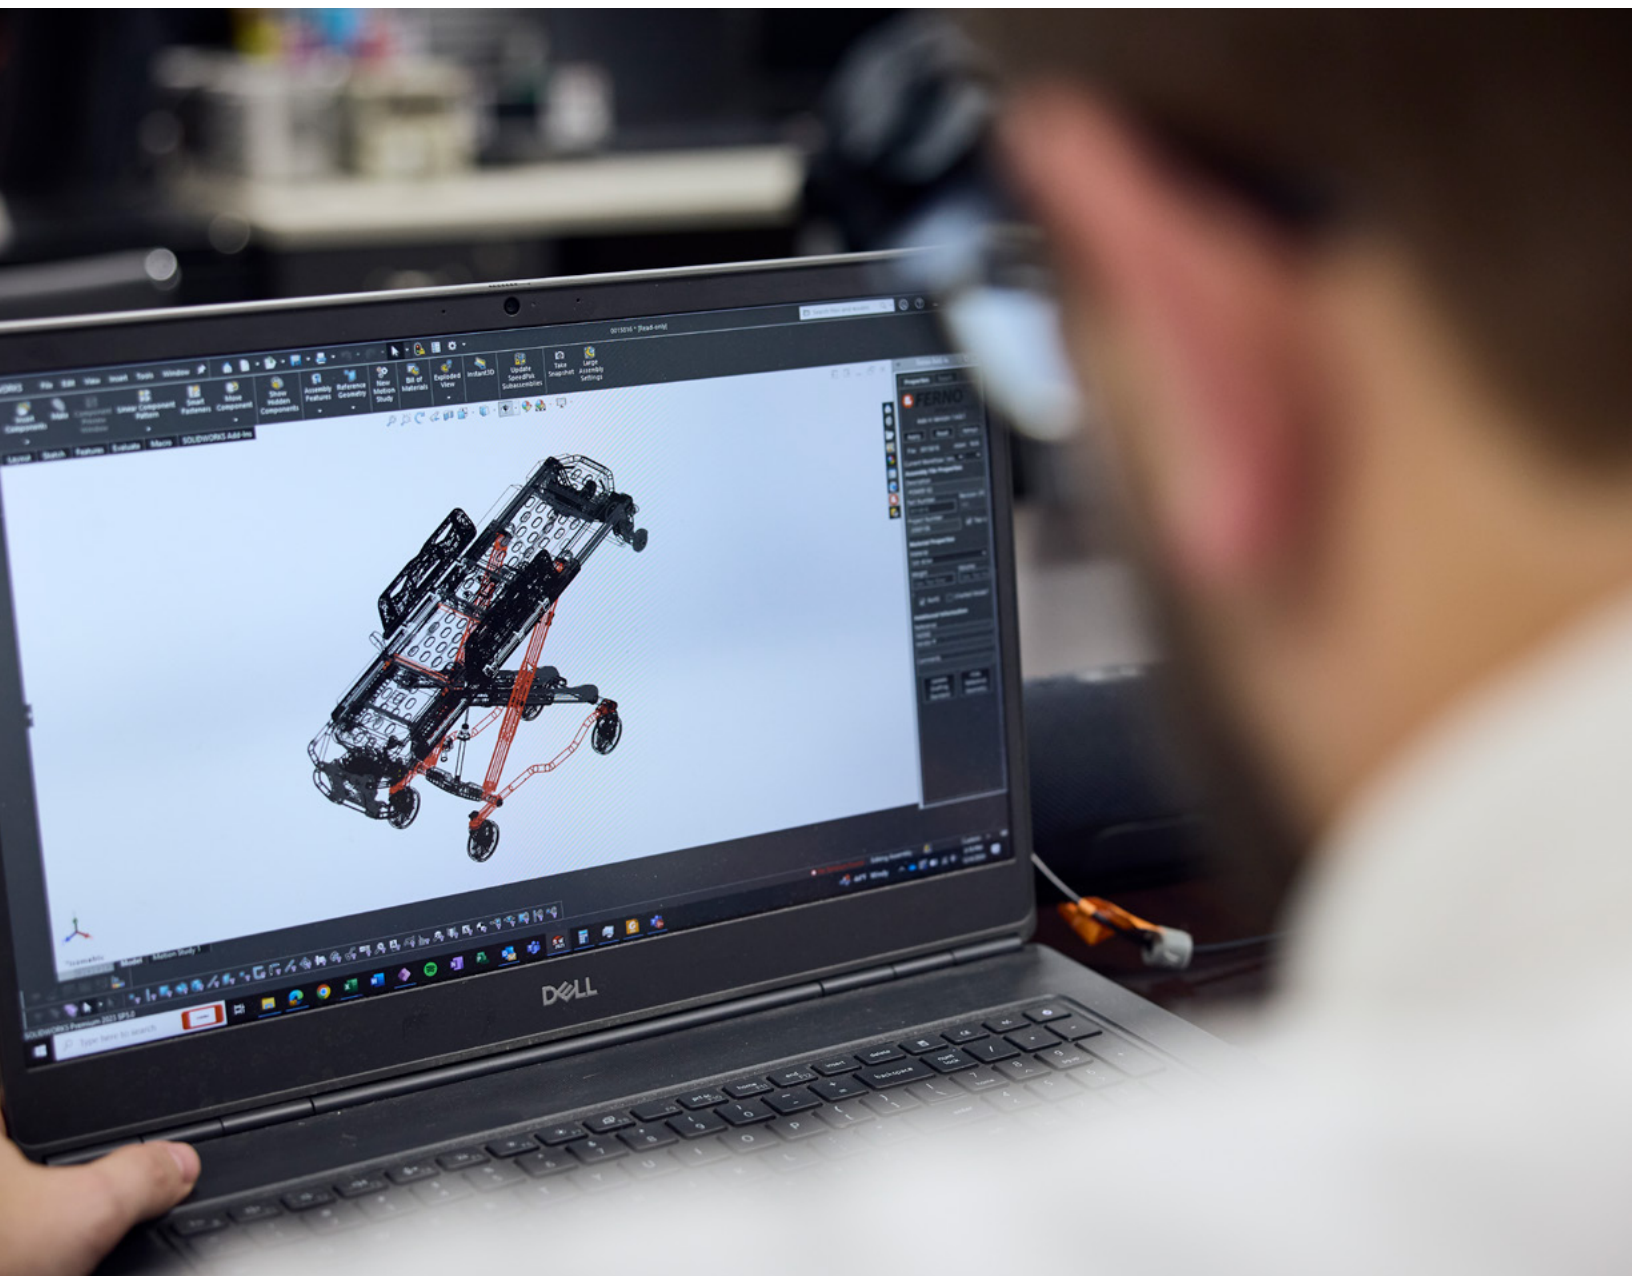


Engineered for reliability,  
durability, and performance.

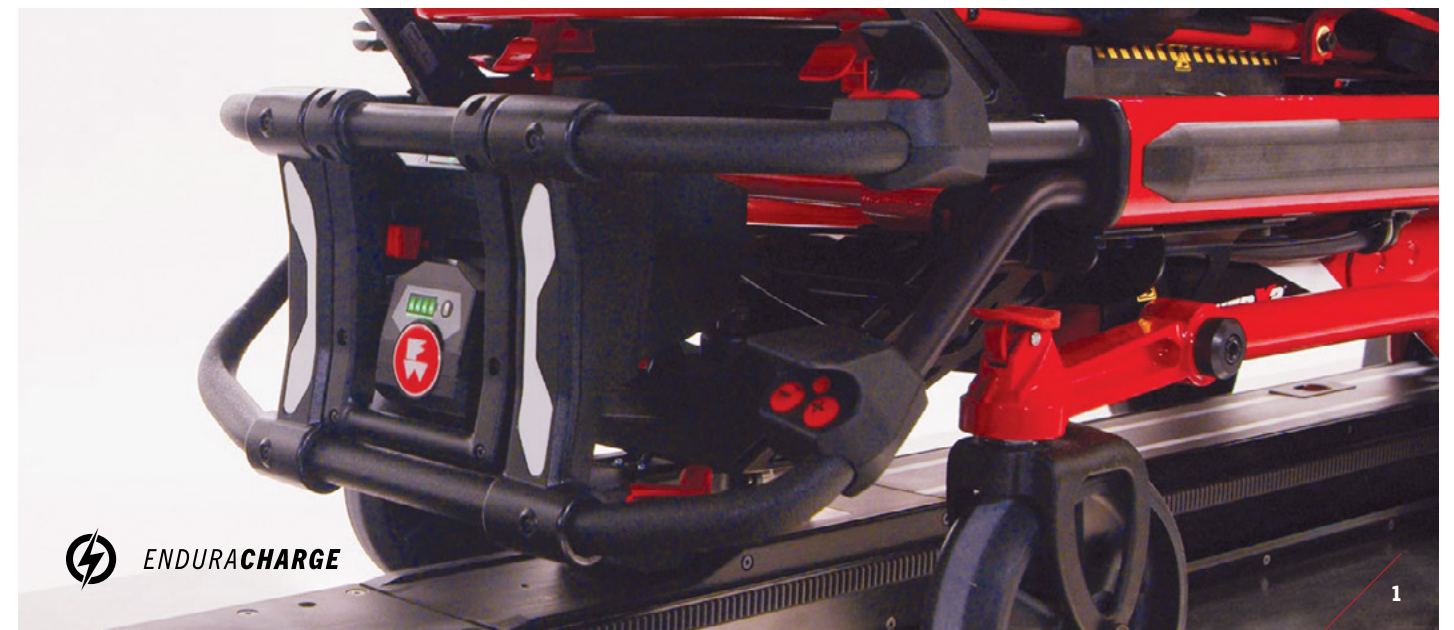

- 1 ICS® Integrated Charging System improves battery management\* (available with Power F2 and Pro F1 Universal Cot Fastener)
- 2 LCD screen displays cot cycle count for maintenance planning
- 3 Hose-free actuator design for greater reliability and weight reduction
- 4 Controlled environment testing to 10+ years of service

\* COMPATIBILITY KIT NEEDED TO SECURE THE POWER X2 INTO THE POWER F2, PRO F1

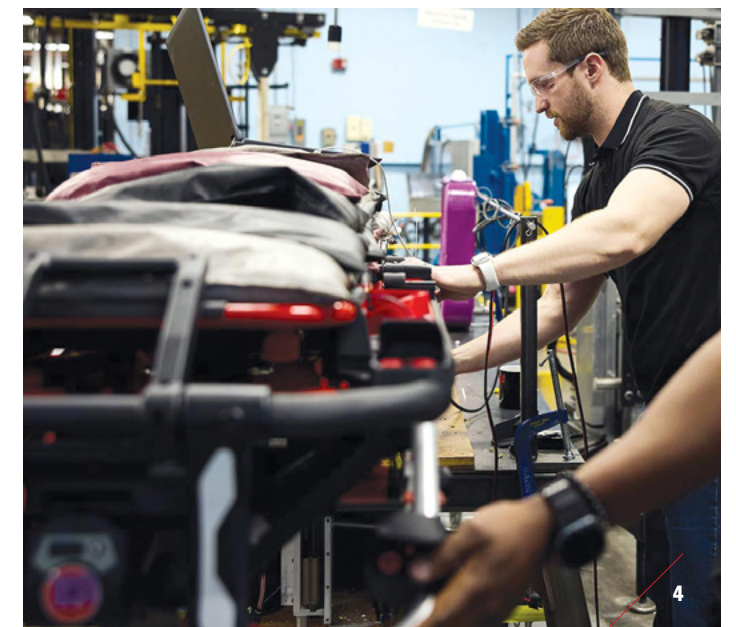





Elevating patient care,  
comfort and safety.



- 1 Knee gatch\* increases clearance between foot-end operator and patient's feet for added comfort
- 2 Shock frame raises patient's feet for treatment of shock
- 3 Sealed bolstered mattress for increased patient comfort (features a sanitary hook and loop style design)

\* OPTIONAL EQUIPMENT

SPECIFICATIONS

ITEM NUMBER  
0015816

LENGTH (MAX)  
79.7" / 2024.5 MM

LENGTH (MIN)  
65.5" / 1663 MM

WEIGHT\*  
146 LBS / 66 KG

LOAD CAPACITY  
700 LBS / 318 KG (UNASSISTED)

1,100 LBS / 498 KG  
(IN RETRACTED POSITION)

POWER  
36.3 VOLT LiFeP04

\*WEIGHT WITHOUT MATTRESS AND RESTRAINTS.

FERNO® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE.

ACCESSORIES

PUSH PULL LIFT BAR  
IV POLE  
STO NET  
PAC RAC  
POLE MOUNTS  
LOAD FRAME 02 HOLDER  
BACKREST 02 HOLDER  
BACKREST POUCH  
PEDI MATE® +  
NEO MATE  
KANGOOFIX  
LBS JR.

STANDARD EQUIPMENT


EQUIPMENT HOOK  
BOLSTERED MATTRESS  
FOOT-END WHEEL LOCKS  
FOOT-END LEAD HANDLE  
ANTLER AND RAIL COMPATIBILITY  
SCENE LIGHTS  
COLOR CODED X-RESTRAINTS  
STATUS DISPLAY WITH CYCLE COUNTER  
36.3V LiFeP04 BATTERY

COMPLIANCE\*

SAE J3027  
CAAS-GVS  
IP56  
KKK-A-1822F  
NFPA 1900  
IEC 60601-1-2  
ISTA 3B  
EN 1789 (IN PROCESS)

\*THE FERNO® POWER X2™ IS COMPLIANT WITH THE ABOVE STANDARDS WHEN USED WITH THE PRO F1™ COMPATIBILITY KIT.



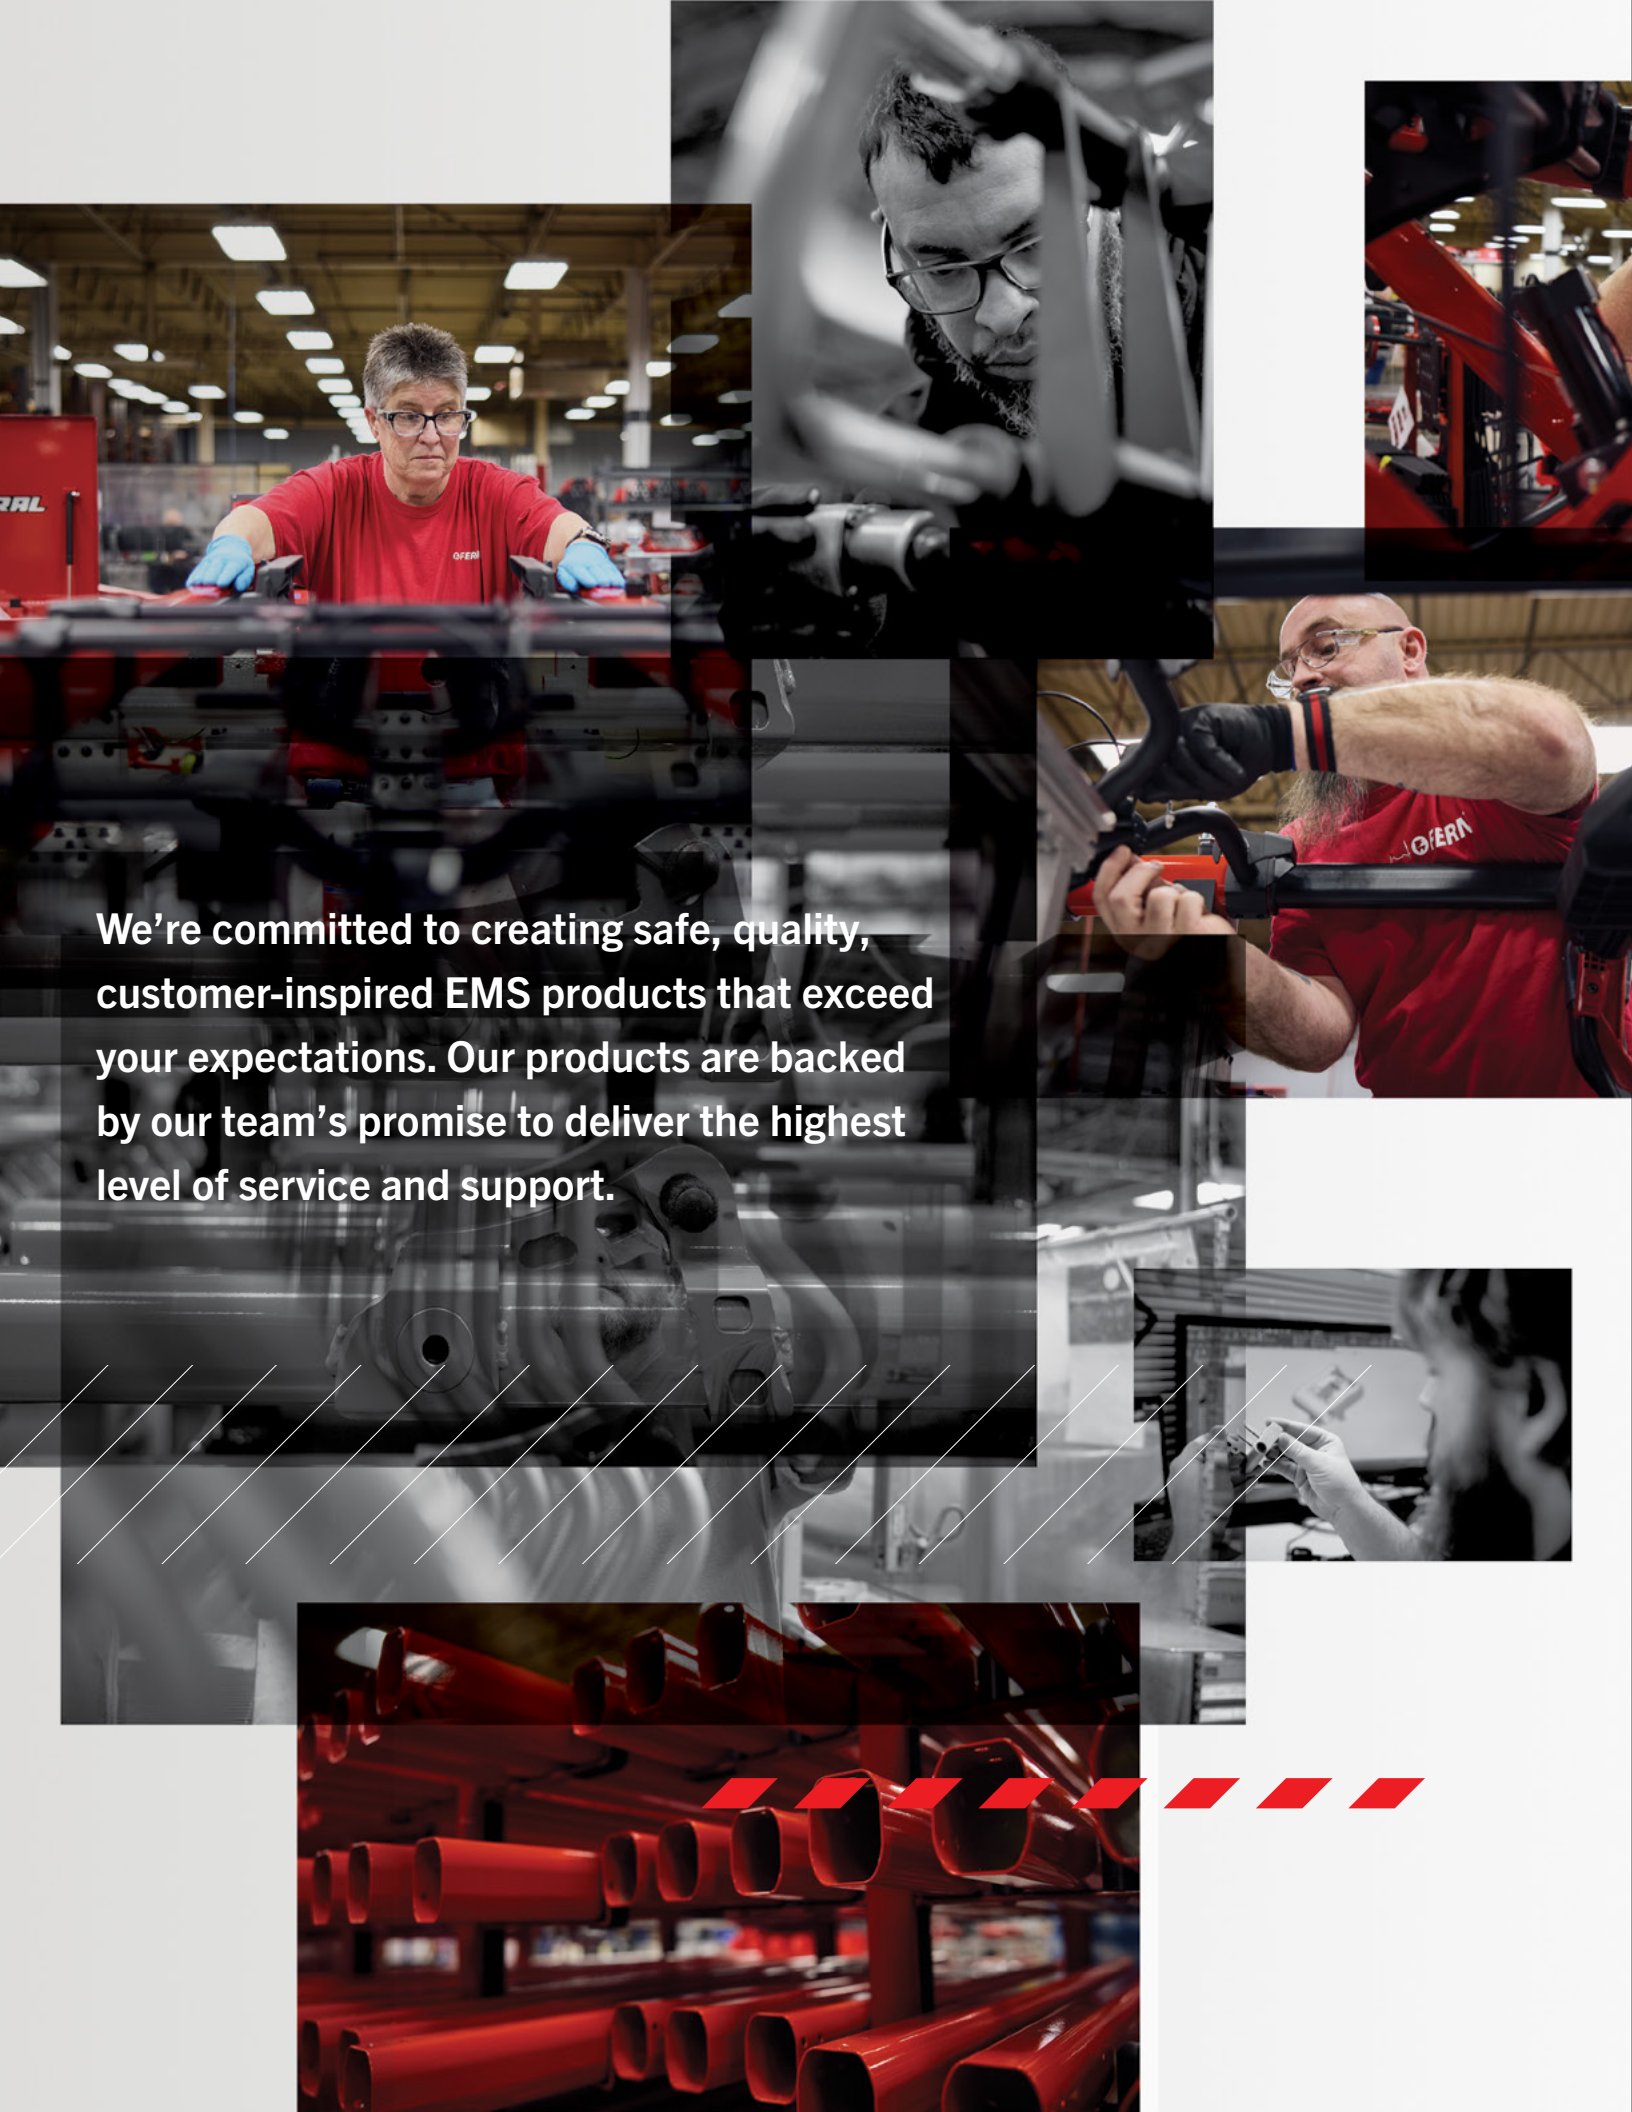

We're committed to creating safe, quality, customer-inspired EMS products that exceed your expectations. Our products are backed by our team's promise to deliver the highest level of service and support.

*"The goal is to change the industry. To make an impact in the emergency response industry. Make it easier on EMTs to reduce injury risk and extend careers."*

JONATHAN  
PROJECT ENGINEER, FERNO





FERNO Inc.  
70 Weil Way  
Wilmington, OH 45177

[FERNO.COM](http://ferno.com)

UNITED STATES  
1-877-733-0911  
1-937-382-1191 - Fax  
1-888-388-1349 - Fax Orders  
[fernoorders@ferno.com](mailto:fernoorders@ferno.com)

INTERNATIONAL  
1-937-382-1451  
1-937-382-6569 - Fax  
[intlsales@ferno.com](mailto:intlsales@ferno.com)

SERVICE  
877-733-0911  
[techsup@ferno.com](mailto:techsup@ferno.com)

COT CARE & MAINTENANCE  
[service@ferno.com](mailto:service@ferno.com)

© 2025 FERNO, Inc.  
MAY-25-v3.0